

TDT7
TDT9
TDT10




DUMP TRUCKS



SPECIFICATIONS	TDT7	TDT9	TDT10
Drive Type	4X2	4X2	4X2
Chassis Mass			
Gross Combination Weight kg (lb)	16.000(35.274)	16.000(35.274)	15.890(35.031)
Complete Kerb Mass kg (lb)	7.500(16.535)	7.500(16.535)	7.605(16.766)
Max. Laden Mass kg (lb)	11.000(24.251)	11.000(24.251)	13.000(28.660)
Loading Capacity m3 (cu.ft)	6 - 7.5(212 - 265)	6 - 7.5(212 - 265)	9 - 13.5(318 - 459)
Performance			
Max. Speed kmh (mph)	90(55,9)	90(55,9)	80(49,7)
Chassis Description			
Max. Length mm (ft)	6.730(22,1)	6.730(22,1)	6.730(22,1)
Max. Width mm (ft)	2.430(8,0)	2.430(8,0)	2.430(8,0)
Max. Height mm (ft)	2.680(8,8)	2.680(8,8)	2.680(8,8)
Wheelbase mm (ft)	3,950(13,0)	3,950(13,0)	3,950(13,0)
Engine	B170 33	B170 33	B190 33
Brand	Cummins	Cummins	Cummins
Type	4 stroke, watercooled	4 stroke, watercooled	4 stroke, watercooled
Power kW (Hp)	127(170)	127(170)	142(190)
Max. Torque Nm (lb ft)	750(553,2)	750(553,2)	1.100(811,3)
Displacement L (cu. In)	5.9(360)	5.9(360)	5.9(360)
Transmission			
Brand	Titanium	Titanium	Titanium
Type	DF6S650	DF6S650	8JS85
PTO	Side or rear take force	Side or rear take force	Side or rear take force
Clutch Type	Push type	Push type	Push type
Diameter mm (in)	270(10,6)	270(10,6)	350(13,8)
Service Brake	Dual circuit air brake	Dual circuit air brake	Dual circuit air brake
Parking Brake	Dual circuit air brake	Dual circuit air brake	Dual circuit air brake
Steering	Power Steering	Power Steering	Power Steering
Axles			
Front Axle Ton (lb)	3,6(7.200)	3,6(7.200)	5(10.000)
Suspension mm (ft)	1.250(4,1)	1.250(4,1)	1.250(4,1)
Rear Axle Ton (lb)	8(16.000)	8(16.000)	10(20.000)
Suspension mm (ft)	2.150(7.1)	2.150(7.1)	1.950(6.4)
Ratio	4,4	4,4	4,5
Tires	10.00R-20 steel wire	10.00R-20 steel wire	10.00R-20 steel wire
Fuel Tank Capacity L (gal)	200(52,8)	200(52,8)	200(52,8)
Cab Type	Standard	Standard	Standard
Tank Body Cargo Box Volume m3 (cu.ft)	6(211,9)	8(282,5)	10(353,1)
Tank Material Thickness mm (in)	side 4(0,16), bottom 6(0,24)	side 4(0,16), bottom 6(0,24)	side 4(0,16), bottom 6(0,24)
Cargo body dimensions Length mm (ft)	4.200(13,8)	4.200(13,8)	4.200(13,8)
Cargo body dimensions Width mm (ft)	2.300(7,5)	2.300(7,5)	2.300(7,5)
Cargo body dimensions Height mm (ft)	800(2,6)	800(2,6)	1.100(3,6)

The Specifications Are Subject To Change Without Notice. The Pictures May Include Options.
The Actual Color & Appearance Of The Product May Differ From What Is Shown.

DIMENSIONS

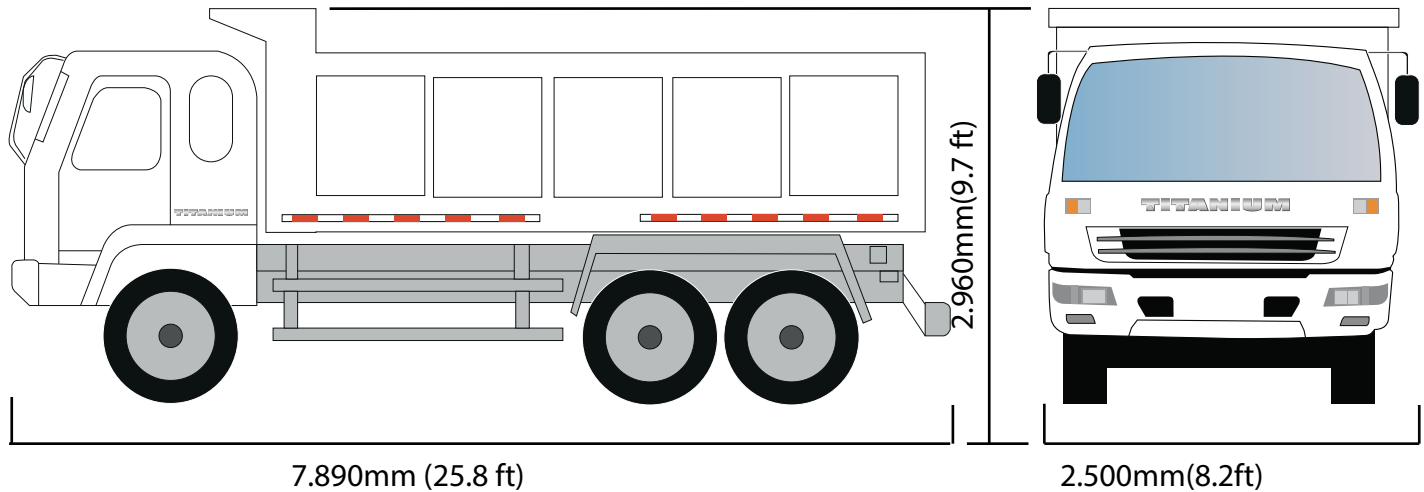

EQUIPMENT

- Cab Type MAN F2000, Lenthened flat roof
- 4 Point Hydraulic Suspension
- Air Conditioned
- Hydraulic Suspeded Driver Seat Whit Seabelts
- Slepig Bed
- Hydraulic reversal cab
- Radio mp3

Reinforced front and rear axles and suspension system ensures safety and maneuverability. Offers excellent visibility and an improved easy-to-read instrument panel. All system controls and indicators are conveniently located for the operator. Ergonomic adjustable seating and user-adjustable steering wheel is standard.

The Specifications Are Subject To Change Without Notice. The Pictures May Include Options. The Actual Color & Appearance Of The Product May Differ From What Is Shown.

TITANIUM